



TAURUS CHAIN

24V Chain sliding motor for gate up to **800 LBS**



Led light (optional)



Release system through robust nylon lever and metal lock performance




No limit switches for easy installations

- Die-cast aluminum body with cathaphoresis treatment
- Optional micro-switch on release lever
- Electronic anti-crushing clutch
- Adjustable slowdown in opening and closing
- Led light in option on all models
- Release system with robust aluminium lever and metal lock
- Nice design, compact and easy to install
- Built - in battery back up system (BBU)


| SMALL FEATURES | TAURUS CHAIN |
|--------------------------|---------------------------|
| Power Supply (V) | 120V ac |
| Power Consumption (W) | 350 W |
| Operating T° range (F°) | -4°F/131°F |
| Max Torque | 15 Nm |
| Duty cycles | 30 % |
| Duty* | residential |
| Max gate weight (lbs) | 800 |
| Max Gate length (feet) | 20 |
| Anti-crushing protection | encoder/electronic clutch |
| Operator weight | 24 Lbs |

USER 1 24V DG Maxi

- Management of one 24V motor
- Adjustable slowdown in opening and closing
- Motor speed adjustment
- Adjustable pedestrian opening
- 24V Led warning lamp
- Connector for RF radio receiver plug-in
- Working times self-learning
- Simplified programming through buttons and display
- Programming through JOLLY 3 palm also
- Adjustable amperometric type inversion on obstacle
- Photocells self-test
- Balanced or standard safety edge management
- Extractable terminals
- Separate torque adjustment for opening and closing
- Slowdown speed adjustment
- Emergency battery management through optional battery charging card
- Automatic, security and step by step type 1, step by step type 2, 2 buttons, dead-man logics
- Motor inversion and limit switch (right/left hand mounting)
- Automatic closing setting
- Start in pause setting
- Prepared for Master/Slave function
- Low consumption in standby
- Adjustable courtesy light output up to 4 minutes
- Setting number of cycles for assistance
- Settable photocell inputs
- Management of photocells 10K
- ... and many other functions

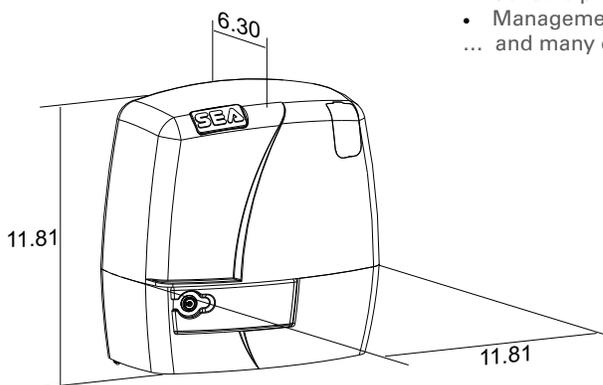

Dimensions (inches)

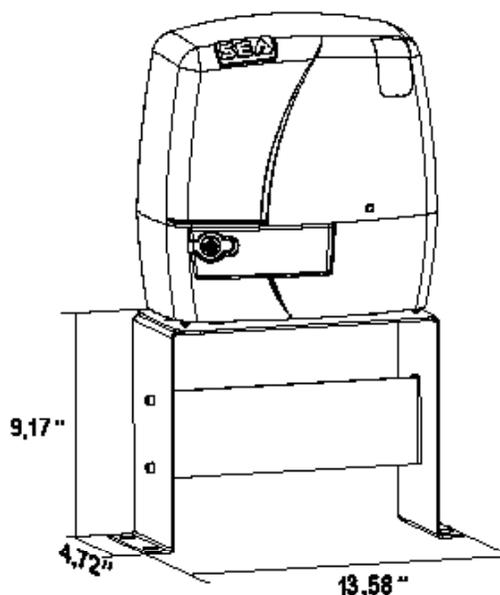

PACKAGE TAURUS CHAIN

| |
|--|
| N.1 TAURUS CHAIN with control board |
| N.20 Feet of chain (type 40) |
| N.1 Receiver |
| N.1 Remote control 433 Mhz |
| N.1 Foundation plate |
| N.1 Installation accessories Kit |
| N.1 Installation instructions and general notice |
| N.1 Warning signboard |
| 1 pc Pallet 14x9x H14 inches - 41 LBS |
| 40 pcs for pallet |